

TEXLASH

Signode's one-way lashing system for in-transit product safety



Advantages

Texlash is Signode's one-way lashing system made of heavy duty polyester textile fibers.

- High strength
- High elasticity - excellent elongation and retained tension
- Very high shock absorbance and recovery
- Wide range of operative temperatures (-40°C to +75°C)
- High resistance to UV radiation; can work in all weather conditions
- Safe on product - no indentation or rusting
- Safe to use - operators do not require protective gloves / eye glasses
- Lighter than steel; fast and easy to apply in limited space
- Can be re-tensioned - facilitates in-transit inspection



TEXLASH


Signode's one-way lashing system for in-transit product safety

Specifications

Strap				
Description	Part Number	Break Load (Kg)	Thickness (mm)	Meters/Pack
32mm	SR 95/32	2000	1.2	250
40mm	3664/40	5000	2	200
Dimension tolerance = +/- 1mm width				
Buckle				
Description	Part Number	Wire Diameter (mm)	Pieces / Box	
32mm	BHDF-32	7	250	
40mm	OWB4040	10	50	
40mm Hook	WH5050NS	11	50	

Texlash solution

A range of tools also available for a variety of lashing applications

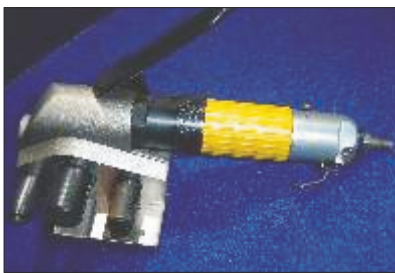

Pneumatic Tensioner for 32 mm strap



Manual Tensioner for 32 mm strap



Manual Tensioner for 40 mm strap

Signode support

Our experts are just a call away to assist you in determining the correct lashing pattern and product, based on application and transit conditions.



Signode India Limited
Email : info@signodeindia.com
URL : www.signodeindia.com

The company has a policy of continuous product development and reserves the right to alter specifications without prior notice